

PRODUCT
BROCHURE

2021



**High speed computerized
flat-bed interlock**



W4


W4

High Speed Computerized Flat-bed Interlock Machine
Full-automatic; Multifunctional; Stable



1 Automatic thread trimmer, Enhance operation efficiency

The upper and lower thread trimmer, service life of the Scissors is longer, with less trouble and high efficiency , 100% trimming precisely

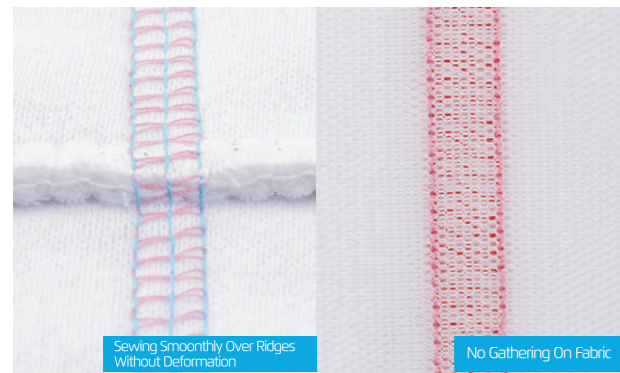


2 For light and heavy fabric , beautiful stitch

Enlarge the sewing range , suitable for various fabrics ,smooth sewing without arch



4 One machine has multi-functions, fast switching

Only adding additional accessories, One machine is capable for Plain seam, Tape binding, Cover seam sewing and Bottom hemming , suitable for various process Sewing

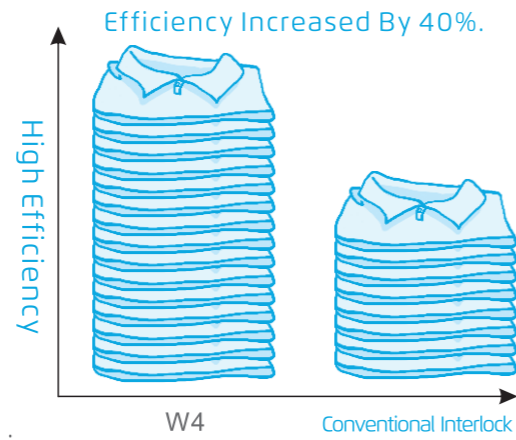


3 Voice guide , easy to learn and easy to use

Each Button has Voice Reminder, Each Operation has Scientific Voice Guide .The simple fault can be solved by voice navigation function




5 Integrated design, plug and operate right way

Mechanical and electrical integration, using only with one plug in a controller

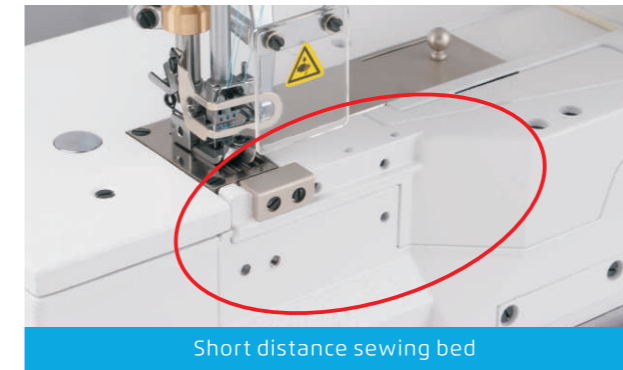

Short distance sewing bed

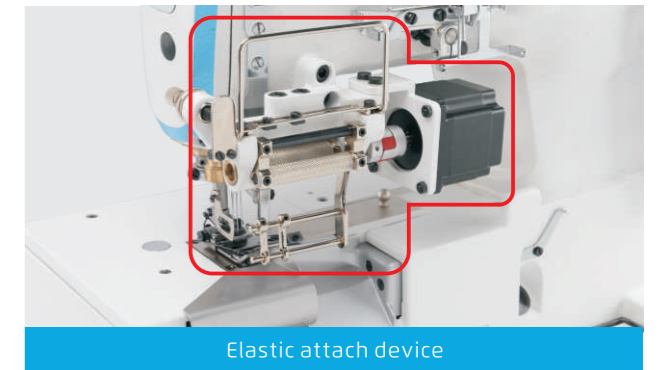

Elastic attach device



Out moved thread cam,fast positioning



Control oil efficiently ,high good-product (yield) rate

Specification

Model	Functions	Needle	Needle No.	Thread No.	Stitch Length (mm)	Stitch Width (mm)	Differential Ratio	Presser Foot Lifting Height (mm)	Max. Speed (s.p.m)	Volume (mm)	Weight (kg)
W4-UT-01GB	Plain Seaming	UY128GAS 11-14#	3	5	1.5-4.5	5.6/6.4	0.65-1.3	7	5500	670×445×595	54/64
W4-UT-02BB	Tape Binding	UY128GAS 11-14#	3	5	1.5-4.5	5.6/6.4	0.65-1.3	7	5500	670×445×595	54/64
W4-UT-03DB	Covering Stitch	UY128GAS 11-14#	3	5	1.5-4.5	5.6/6.4	0.65-1.3	7	5500	670×445×595	54/64
W4-UT-08AC	Bottom Hemming	UY128GAS 11-14#	3	5	1.5-4.5	5.6/6.4	0.65-1.3	7	5500	670×445×595	54/64
W4-D-01GB	Plain Seaming	UY128GAS 11-14#	3	5	1.5-4.5	5.6/6.4	0.65-1.3	7	5500	670×445×595	48/58
W4-D-02BB	Tape Binding	UY128GAS 11-14#	3	5	1.5-4.5	5.6/6.4	0.65-1.3	7	5500	670×445×595	48/58
W4-D-03DB	Covering Stitch	UY128GAS 11-14#	3	5	1.5-4.5	5.6/6.4	0.65-1.3	7	5500	670×445×595	48/58
W4-D-05CB	Elastic Lace Attaching (Right-Side Cutter)	UY128GAS 11-14#	3	5	1.5-4.5	5.6/6.4	0.65-1.3	5	4000	670×445×595	48/58
W4-D-07CB	Elastic Lace Attaching	UY128GAS 11-14#	3	5	1.5-4.5	5.6/6.4	0.65-1.3	5	5500	670×445×595	48/58
W4-D-08AC	Bottom Hemming	UY128GAS 11-14#	3	5	1.5-4.5	5.6/6.4	0.65-1.3	7	5500	670×445×595	48/58
W4-D-23GB	Plain Seaming (Large Stitch Length)	UY128GAS 11-14#	3	5	6	5.6/6.4	1	7	4000	670×445×595	48/58
W4-D-23BB	Tape Binding (Large Stitch Length)	UY128GAS 11-14#	3	5	6	5.6/6.4	1	7	4000	670×445×595	48/58
W4-D-23GBL	Plain Seaming (Extra Large Stitch Length)	UY128GAS 11-14#	2	4	7-7.5	5.6/6.4	1	7	4000	670×445×595	48/58
W4-D-23BBL	Tape Binding (Extra Large Stitch Length)	UY128GAS 11-14#	2	4	7-7.5	5.6/6.4	1	7	4000	670×445×595	48/58

Note: UT: computerized, D: direct drive.